




MCNAUGHTON
WINDOWS & DOORS



Direct Fixed Weather Board
Jamb
Double Hung System
Weights and Pulleys

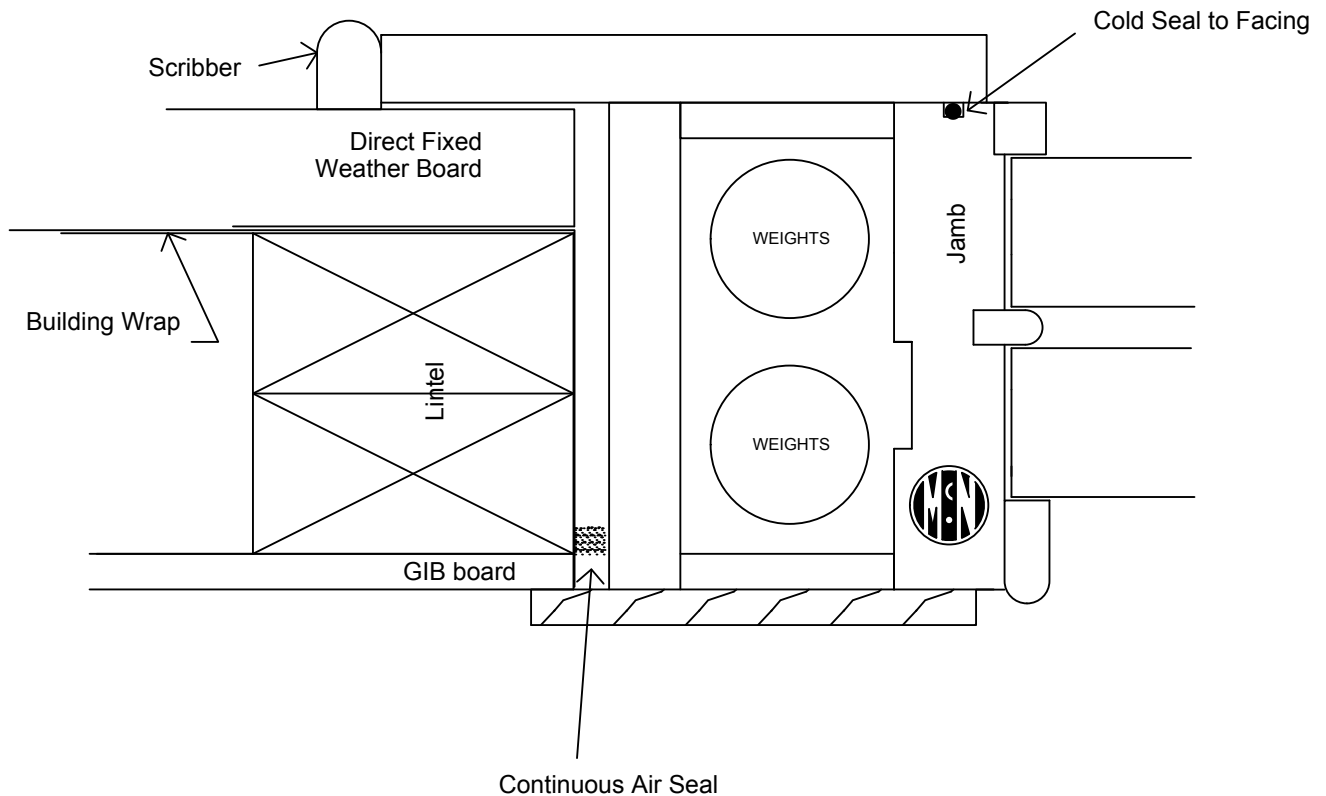

NOTE:

- COLD SEALANT NETURAL CURE MODIFIED SILICONE
- SCREW OR NAIL FIXING JAMBS 200MM FROM HEAD AND SILL MAXIMUM 600 CENTRES
- SILL FLASHINGS TURNED UP 20MM AT EACH END OF FRAMES AND SEALED
- FIXING THROUGH SILL AS SHOWN ON DRAWINGS
- SITE FIXED FACINGS MUST HAVE COLD SEALAND BETWEEN FACING AND JAMB